

1019-RM

14 in. Recessed Wall and Hard-Lid Ceiling Mounted Plastic Wi-Fi Access Point Enclosure with Low Profile Snap-on Cover

Collection: In-Plane™ | Series: 1019

Oberon's Model 1019 In-Plane™ enclosures conceal Wi-Fi and Small Cell APs, Wi-Fi routers, and associated cabling in residence halls, hotels, multiple dwelling units, retail locations and other indoor venues. Recess AP into the wall and conceal with the low profile, paintable, snap-on cover. This rugged UL 94-5VB ABS plastic enclosure is virtually transparent to wireless signals so there is minimal impact on wireless coverage. The 1019 features slots for TIA 569-B compliant furniture faceplate RJ-45 modular jacks, to facilitate cable termination and management.



Features & Benefits

- Recess PoE Wi-Fi and Small cell APs and wireless routers into hard lid ceiling or wall environment
- Use as a discrete in-wall Horizontal Connection Point enclosure for low voltage structured cabling
- Paintable snap-on cover is almost flush to wall
- Easily fastens to drywall using swivel fasteners
- Secures, conceals, and organizes cabling and patch cords from all leading vendors
- All plastic enclosure minimizes RF interference

Technical Specifications

- Designed to conceal and secure PoE APs with integrated or non-detachable antennas. Also designed as a recessed Horizontal Connection Point enclosure for low voltage network cabling
- Performance: Ventilated, paintable, impact resistant, and flame retardant UL 94-5VB PC/ABS plastic enclosure is virtually transparent to wireless signals
- Snap-on cover with concealed attachment points can optionally be screwed on for added security
- Universal T-bar mounting plate for most vendor's APs, mounting features for Cisco APs
- Slots for TIA 569-B compliant furniture faceplate RJ-45 modular jacks
- Cable management features
- Swivel fasteners secure enclosure into pre-existing walls and ceilings 0.75 in. thick or less
- Construction: UL 94-5VB Flame retardant PC/ABS plastic. All PC/ABS components are white. 18 gauge galvanized steel AP mounting plate
- Size: Cage (backbox) is 13.5 x 13.5 x 3.7 in. (343 x 343 x 94 mm). Cover is 15.7 x 15.7 in. (400 x 400 mm)
- Maximum useable internal dimensions: 12.75 x 12.75 in. (323.9 x 323.9 mm)

Fits the following AP's:

Aerohive
 AP110/120, AP20, AP250, AP320, AP330, AP340/350, AP370


Arista
 C-230

Aruba
 AP-135, AP-205, AP-215, AP-225, AP-228, AP-303, AP-305, AP-315, AP-325, AP-335, AP-345, AP-515, AP-535, AP-555, AP-635

Have questions about any of our solutions?

Contact us at **877-867-2312** or **Sales@oberoninc.com**

Shown ceiling cutaway with Cisco AP (not included)

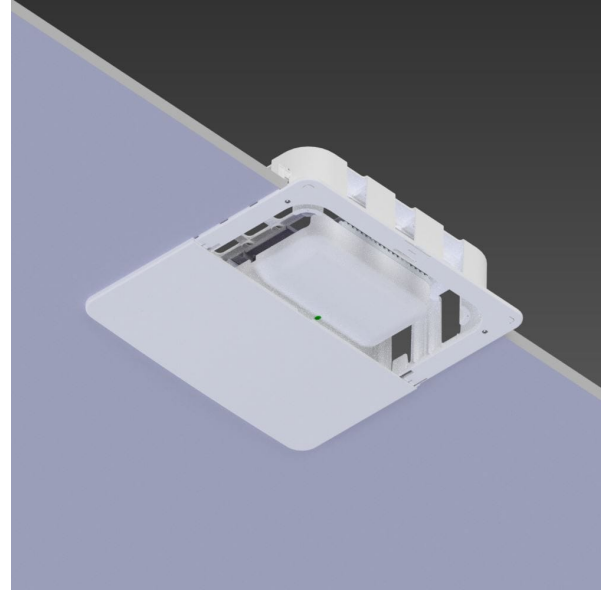

3D view for 1019-RM



Measurements (Maximum values*):

Width: 15.7 in.
 Back-box: xx in.
 Height: 15.7 in. Depth: 4 in.
 Item Weight: 3.5 lbs.
 Shipping Weight: 4 lbs.

Includes:

- (1) Recess box and bezel
- (1) AP Mounting Plate
- (1) Tamper Resistant Snap-on Cover
- (1) Spare Swivel Fasteners
- (6) Removable Cable Management Pegs
- (4) #6 – 19B x 1/4 in. Screws
- (4) #8 – 18A x 1/4 in. Screws
- (4) #4 – 24A x 1-1/2 in. Screws
- Installation instructions

Cisco

1600i/1700i/2600i/2700i/3500i/3600i/3700i Series, 1810W Series, 1815W, 1830i/1850i Series, 2800e/3800e Series with DART Connector, 2800i/3800i Series, 4800 Series, 9115AXI, 9117AX, 9120AXI

Corning Spidercloud

SCRN-320/SCRN-220

Extreme Networks

AP305C, AP3705i, AP3710i, AP3715i, AP3765i, AP3801i, AP3805i, AP3825i, AP3935i, AP3965i, AP410C, AP410e, AP410i, AP505i / AP510i, AP510C, AP650

Meraki

MR32/34/42, MR33, MR44/45/46, MR52/53, MR55/56

Mist

AP41

Ruckus

7300 Series and 7025, R310, R320, R510, R550, R610, R650, R710, R720, R850

Ubiquiti

UniFi UAP-AC-HD, UniFi UAP-XG